


SENTINEL®

Model 1551-7



**GUARANTEED
FOR LIFE**

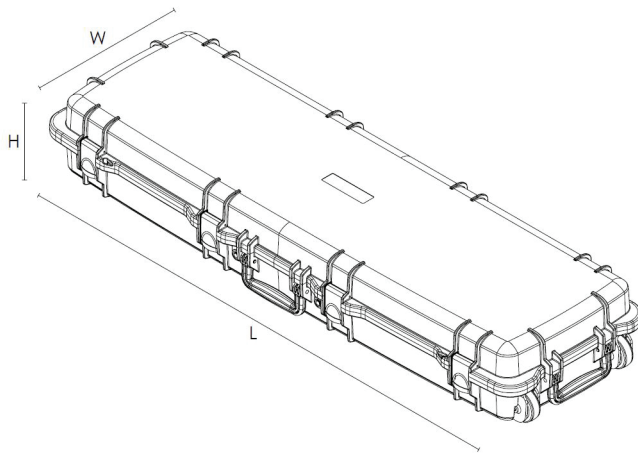

1551-7 Specifications

Interior Dimensions	14.7" W x 51.5" L x 7.0" H
Exterior Dimensions	17.5" W x 54.2" L x 7.7" H
Lid Inner Depth	3.0"
Bottom Inner Depth	4.0"
Approx. Weight (empty)	19.8 lbs
Material	Copolymer
Minimum Temperature	-40°F (-40°C)
Maximum Temperature	160°F (71.1°C)

Standard Features

- Injection molded construction
- Watertight, airtight, dustproof
- Two automatic pressure relief valve
- Two molded-in padlock brackets
- EPDM gasket
- Stainless steel hardware
- Pull handle and wheels
- Four secure, easy-open latches

Certifications (capable of manufacturing to)

- MIL-STD-3010 Test Procedures for Packaging Materials and Containers
- FED-STD-101 Test Procedure for Packaging Material
- ATA Specification 300, Category 1
- ASTM D4169
- IP67 – IEC Standard 60529
- MIL-STD 810
- ASTM D999 – Vibration
- ASTM D6179
- ASTM D5276
- STANAG 4280/AEPP-3 Standard Packaging Test Procedures
- ISTA Test Procedure 1A

Custom Options*

- Foam inserts
- Thermoformed inserts
- Mounting flanges
- Case wall cutouts/routing
- Dividers/trays
- Literature pockets
- Removable lids
- Name plates
- Adhesive labels
- Standard/custom colors

*Contact Gemstar for details and pricing



800-533-3631 | GemstarCases.com

GEMSTAR 
CUSTOM HARD CASES