


STRONGHOLD®

Model SH1622-15



**GUARANTEED
FOR LIFE**

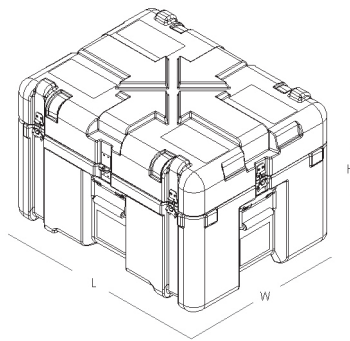

SH1622-15 Specifications

| | |
|------------------------|-----------------------------|
| Interior Dimensions | 16.8" W x 22.8" L x 15.3" H |
| Exterior Dimensions | 20.3" W x 25.6" L x 17.4" H |
| Lid Inner Depth | 4.1" |
| Bottom Inner Depth | 11.1" |
| Approx. Weight (empty) | 24.4 lbs |
| Material | Polyethylene |
| Minimum Temperature | -40°F (-40°C) |
| Maximum Temperature | 160°F (71.1°C) |

Standard Features

- Rotatorially molded, double-walled construction
- Watertight, airtight, dustproof
- Interlocking stackable design
- Recessed, heavy-duty stainless steel hardware
- Tongue & groove construction with gasket
- Spring-loaded bail handles

Certifications (capable of manufacturing to)

- MIL-STD-3010 Test Procedures for Packaging Materials and Containers
- FED-STD-101 Test Procedure for Packaging Material
- ATA Specification 300, Category 1
- ASTM D4169
- IP67 – IEC Standard 60529
- MIL-STD 810
- ASTM D999 – Vibration
- ASTM D6179
- ASTM D5276
- STANAG 4280/AEPP-3 Standard Packaging Test Procedures
- ISTA Test Procedure 1A

Custom Options*

- Custom foam
- Thermoformed inserts
- Shock mounts
- Literature pockets
- Mounting flanges & brackets
- Automatic pressure relief valve
- Custom colors
- Hinged compartments
- Case wall cutouts
- Name plates
- Mold-in graphics
- Stencil marking
- Reverse application
- Removable lid
- Removable caster wheels

*Contact Gemstar for details and pricing



800-533-3631 | GemstarCases.com

GEMSTAR 
CUSTOM HARD CASES